

CERTOTTICA SCRL
Authority for the certification of Personal Protective Equipment
Zona Industriale Villanova 7/A
32013 Longarone (BL) Italy
Tel.: ++39 437 573407 Fax: ++39 437 573131
E-Mail: info@dolomiticert.it - Web: www.certottica.it



00719

EU TYPE-EXAMINATION CERTIFICATE

n. AC: **25-280**

In realisation of the Regulation (EU) 2016/425 of the European Parliament and of the Council of 9th of March 2016 on personal protective equipment and repealing Council Directive 89/686/EEC.

CERTOTTICA SCRL

NOTIFIED BODY IDENTIFICATION NUMBER: 2008

considered the application for EU type-examination no. **D 2025-5356** , presented in date **04/11/2025**

CERTIFIES THAT

the Personal Protective Equipment

Personal fall protection equipment – Adjustable lanyard

model

A028

presented by

COFRA S.r.l.

Via dell'Euro 53-57-59 - 76121 BARLETTA (BT) - Italy

results to be in conformity with the applicable essential requirements included into Annex II of the Regulation (EU) 2016/425 dated 9th of March 2016.

The description of the Personal Protective Equipment model, the normative reference, the verification results and the description of the CE marking on the equipment are described on page 2. 3 .4 of the present document.

First issue date: **14/11/2025**

Renewal or revision date: **/**

Expiration date: **13/11/2030**

Longarone, **14/11/2025**

The Director of the Notified Body

(Luca Tamburini)





This document consists of no. 4 numbered pages.

1. Description of the Personal Protective Equipment

Product designation: A028
Commercial trade name: COFRA
Intended purpose: Personal fall protection equipment – Adjustable lanyard

Model: A028
Reference code: "A028-1001" and "A028-1002"
In Conformity with the Standard(s): EN 354:2010 and EN 358:2018
PPE Category: III
Variants: Two variants provided, depending by the model of integrated connectors (see notes at page 3).
Main components and materials: Rope lanyard (both sheath and core): Polyester; Length adjustment device: Carbon steel C45; Terminations' stitching: Polyester HT; Terminations' heat-shrinking sheath: Polyethylene; Free end termination's plastic thimble: Polyethylene
Weight of the device: A028-1001: 665 grams; A028-1002: 985 grams
Length of the device: Maximum length when totally extended: 2 meters
Width/diameter of the device: Rope lanyard diameter: 12 mm
PPE description: Adjustable lanyards of the family "A029" are personal protective equipment to be used in personal fall protection systems (i.e. restraint system, work positioning systems, rope access systems, fall arrest systems and rescue systems) in order to protect and/or to prevent (depending by the use) the final user against falls from a height. They are compliant with EN 354:2010 and EN 358:2018 and are adjustable in length by means of a metallic length adjustment device. One only colour combination provided for this equipment.

Manufacturer's name: COFRA S.r.l.
Manufacturer's address: Via dell'Euro 53-57-59 - 76121 BARLETTA (BT) - Italy
Authorised Representative's name: /
Authorised Representative's address: /
Certificate's holder : COFRA S.r.l.
Holder's address: Via dell'Euro 53-57-59 - 76121 BARLETTA (BT) - Italy

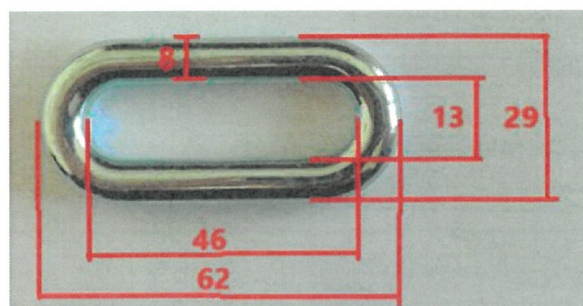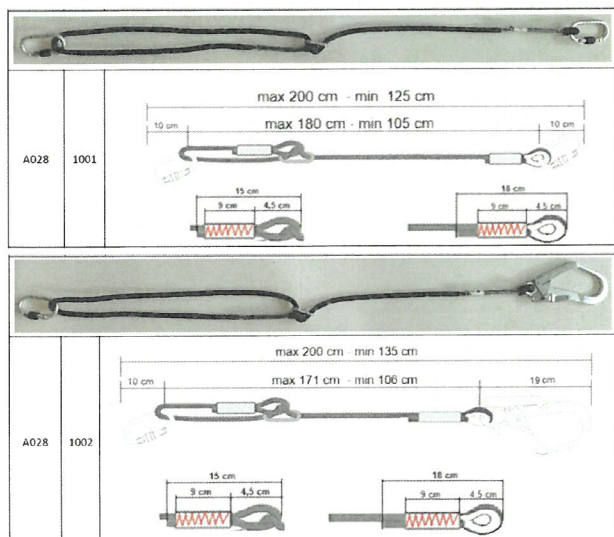

Length adjustment device
Dimensions in mm

2. Levels of protection offered by the personal protective equipment and notes:

Applicable Standards:

EN 354:2010 - "Personal fall protection equipment - Lanyards"

EN 358:2018 - "Personal protective equipment for work positioning and prevention of falls from a height - Belts and lanyards for work positioning and restraint"

/

The protection equipment A028

is in conformity with the basic requirements provided by the standard(s) of reference for the particular fields of utilization the device is addressed to.

EN 354:2010 and EN 358:2018

Moreover, the protection equipment is in conformity with the specific requirements provided by the connected norm for the particular fields of utilization the device is addressed to:

/

The performance characteristics of the protection equipment are:

Maximum rated load declared (EN 358): 150 kg

/

/

Notes:

Two variants provided, depending by the model of integrated extremity connectors: "A028-1001 – WEINING 2 M", equipped with the connector code "A047-1000" from both sides, and "A028-1002 – TOCUMEN 2 M", equipped with the connector code "A047-1000" from one side and with the connector code "A075-1003" from the other side; both variants have a maximum length when totally extended of 2 meters.

3. Test results and test examinations are covered by the following test reports:

Certottica Srl	d241648	27/01/2025
Certottica Srl	d241647	17/02/2025
Dolomitcert Scarl	190766	14/06/2019
Dolomitcert Scarl	150052	12/02/2015



4. Marking

Placement of the marking: Label included under a plastic heat-shrinking sheath on a free-end termination of the rope lanyard, dimensions 65 mm x 30 mm. The example above refers to the variant code A028-1001; for the other variant, markings are the same unless the family name and the code.

5. Declaration for category III personal protective equipment

For category III PPE, this EU Type-Examination Certificate shall be used only in combination with one of the evaluation procedures in accordance with Article 19, letter c), of the Regulation (EU) 2016/425

Applicability for the product covered by this EU Type-Examination Certificate:

YES

Terms and conditions under which the Certificate is issued

- a) Marking and instructions were examined in Italian. Language versions other than the one specified above are under the complete responsibility of the Manufacturer or of his Authorised Representative.
- b) Any variation to the product, to the technical file or, in the provided cases, to the manual or to the quality control procedures, shall be notified in time to CERTOTTICA.
- c) The Manufacturer or his Authorised Representative shall respect the procedures and the regulations provided by CERTOTTICA for the EU Certification.
- d) Copies of this Certificate, supplied to third parties, shall be reproduced in their entirety.
- e) The present Certificate shall be carefully kept by the Manufacturer to be shown, on request, to the Organism of control or to the Vigilance Administration.
- f) The present Certificate remains property of CERTOTTICA, which can ask for it back if some of the above mentioned conditions are not respected.
- g) Any subsequent revision of the present document automatically deletes and replaces it from the date of issue of the revised certificate (the start of validity, that is the renewal or revision date included at page 1 of this Certificate).
- h) The present document can include only a limited description of the product under certification; for a more detailed description, please refer to the correspondent Technical Documentation.

